

Xterio

| Cornice, Brackets & Dentils



ORAC[®]
D E C O R

Cornices




C800

2000 x 65 x 57 mm
Purotouch®




2





C833

2000 x 122 x 111 mm
Purotouch®




C890

2000 x 159 x 216 mm
Purotouch®




C843 HERITAGE XL

2000 x 190 x 250 mm
Purotouch®




C835

200 x 202 x 222 mm
Purotouch®




C832

2000 x 230 x 114 mm
Purotouch®




1



C836

2000 x 271 x 266 mm
Purotouch®





front




C844 HERITAGE XXL

2000 x 273 x 350 mm
Purotouch®



C820

2000 x 160 x 200 mm
Purotouch®



3

Finishing elements to suit **C820**




C820A

3a



C820B

3b



C820C



C820D



C820E



C820F



C820G

3c

Outer corner 90°

Inner corner 90°

Outer corner 135°


Inner corner 135°

Stop end left

Stop end right


Mitre stop end

Brackets




FC01

80 x 350 x 390 mm
Purotouch®




GB02 *

70 x 490 x 400 mm
Purotouch®
Structural max. 35 kg



GB03 *

70 x 630 x 580 mm
Purotouch®
Structural max. 75 kg

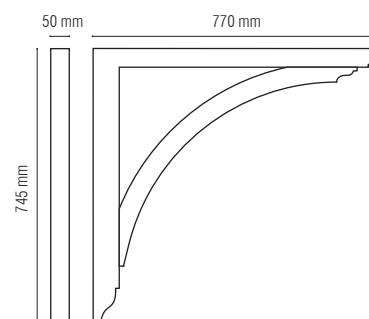

GB04 *

50 x 745 x 770 mm
Purotouch®
Structural max. 75 kg

*white wood grain finish

Dentils



TF01

77 x 123 x 350 mm
Purotouch®



TF02

77 x 120 x 105 mm
Purotouch®




TF03

77 x 100 x 200 mm
Purotouch®




TF04

77 x 200 x 250 mm
Purotouch®



TF05


100 x 135 x 255 mm
Purotouch®



TF06

155 x 75 x 175 mm
Purotouch®

Rafter Foot



RF01

48 x 65 x 113 mm
with unique click system
Purotouch®

ORAC
DECOR

Installation

| of the Xterio Collection



Ask for a free
new **Orac Decor Book**
and samples on:
www.oracdecor.com



**DecoFix Hydro
FDP700**

Gluing on wall and ceiling
290 ml for 7 to 8 m



Extra strong MS polymer glue for exterior applications, non-porous (tiles, glass, ...) surfaces and damp environments

- Remove with soap solution
- Paintable after hardening (min. 24 hrs.)



**DecoFix Extra
FX200**

Joints
310 ml for min. 80 m



+

Polyurethane-based glue to seam joints between mouldings

- Remove excess glue before hardening (max. 1 hour and repeat after 2-3 hrs.)
- Clean with acetone or synthetic thinner
- Can be painted after 24 hrs.
- The more humidity, the faster the drying time

ONLY FULL GUARANTEE WITH DECOFIX

Benefits

| of the Xterio Collection



UV STABLE
NO DISCOLORATION



BRITAIN'S TOP
DENTIL SUPPLIER



NO NEED TO BUY
IN PACK QUANTITIES

ITEMS IN STOCK FOR
IMMEDIATE DISPATCH


Discover also

| Our Interior Solutions



Contact

| Dealer Information

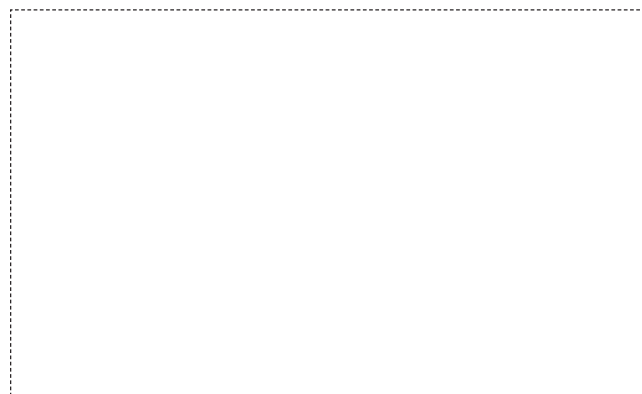

More information on www.oracdecor.com